
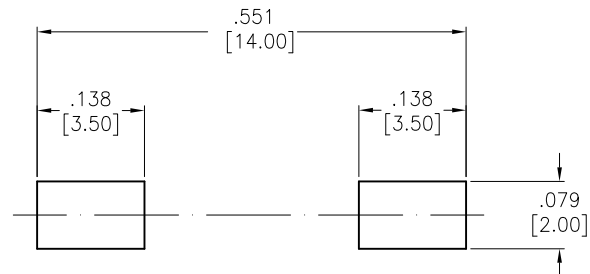




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	2789	RELEASED	06/30/15	

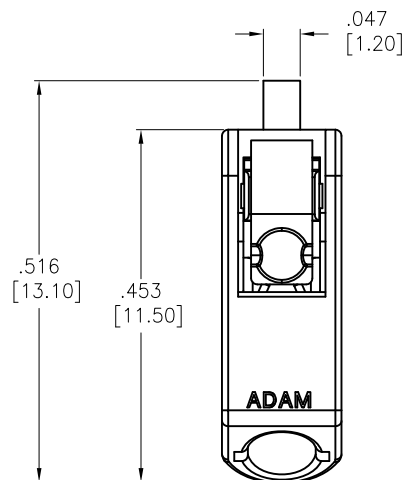

RECOMMENDED PCB LAYOUT

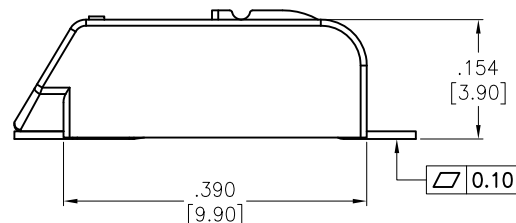

SPECIFICATIONS:
 Electrical:
 Voltage rated: 250 VAC
 Current rated: 9 Amps
 Insulation resistance: 500 MΩ @ 500 VDC
 Withstanding voltage: 500 VAC for 1 minute
 Mechanical:
 Insulator Color: Natural
 Wire range: 24-18AWG
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ±.10 Ø.X ±.10 .XX ±.020 Ø.XX ±.015 .XXX ±.015 Ø.XXX ±.010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS		DATE	TITLE SMD TERMINAL BLOCK, 1 POLE, COLOR NATURAL		
DRAWN	TW	06/30/15			
CHECKED			SIZE X	PART NO. ADT-AN2789-01-C1	REV. -
APPROVED			REF: S00113C	SCALE: NTS	SHEET 1 OF 1