
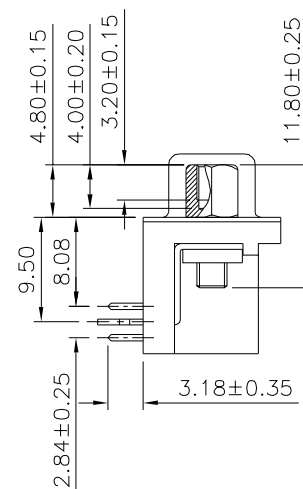
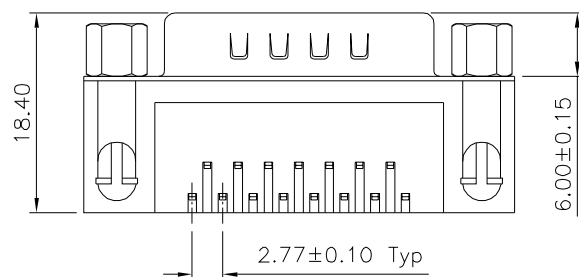
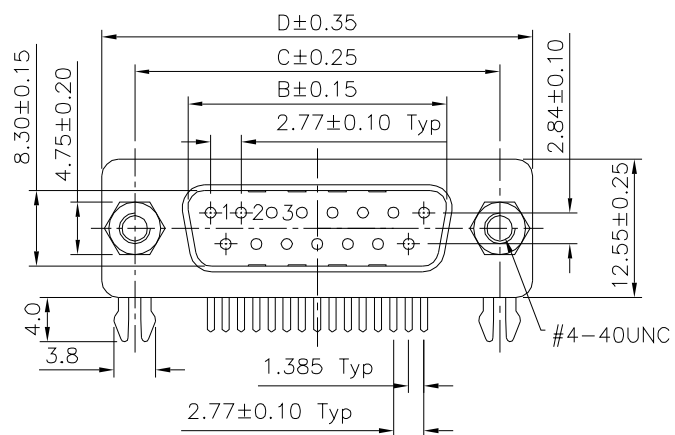


SPECIFICATION

Current Rating:1 Amps
 Withstanding Voltage:1000V(One Minute)
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operating Temperature:-50°C~+105°C
 Shell:SPCC,Nickel Plated
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Boardlock:SPCC,Tin Plated
 Rivet:Copper Alloy,Nickel Plated
 Screw:12L14,Nickel Plated
 RoHS Compliant

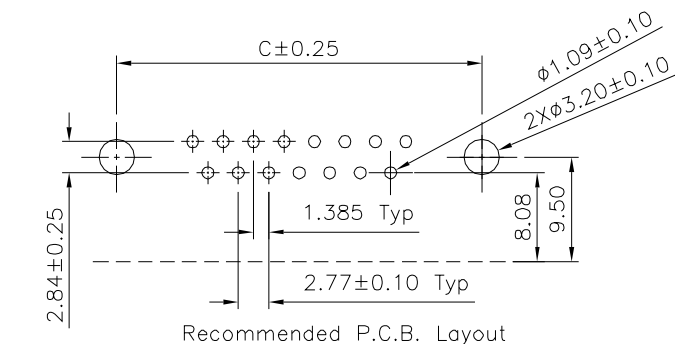

Pin	B	C	D
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

15944

APPROVED BY EMILY

CHECKED BY HZF

DRAWING BY HAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

SCALE

NONE

REV.

B0

UNIT
 mm



NO. REV.

BO NEW RELEASE
 REVISIONS

CHK
 DATE

HZF 05/15/2015