

PRODUCT NUMBER

77313-YXX-XXLF

PLATING SEE SHEET 2

PIN STYLE SEE SHEET 2

RoHS COMPATIBLE

SEE NOTE 7

TOTAL NB OF POSITIONS 04 TO 72

OPTION LETTERS : NOTE 8

PRODUCT NUMBER (BERGSTRIK PACKAGING)

77313-YXX-00LF

PLATING

1= 0.76µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS8= 0.38µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS

4= 2.0µm TIN MIN FULL PLATED

1.27µm NICKEL MIN UNDERLAYER FOR
ALL PLATING VERSIONSINDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 6

POSITIONS PER REEL : 00=45,000 (BERGSTRIK)

PIN STYLE	MATING	SOLDER	OAL
01	5.84	2.41	10.8
02	5.84	3.42	11.8
18	5.84	3.05	11.43
22	7.75	3.05	13.35
24	6.75	2.9	12.2
27	6.6	2.66	11.8

NOTES:

- HOUSING MAT'L : HIGH TEMPERATURE
THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- BERGSTIK PRODUCT PACKAGED IN POLY BAGS.
BERGSTRIK PRODUCT PACKAGED PER REELS.
- 9N MIN RETENTION IN EITHER DIRECTION
- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- FOR PIN IN PASTE SOLDERING APPLICATION :
FINISHED PLATED HOLE Ø1.02-Ø1.06
LAND Ø1.45 MAX
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM
MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE
 - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE
FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD
 - REFLOW COMPATIBLE
 - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - LEGAL STATEMENT: SEE GS-47-0004

8. OPTIONS :

- = POLYBAG PACK

"A" = TAPE & REEL WITH CAP, AS AVAILABLE

"T" = STANDARD TUBE PACKAGING

"V" = BLIBOX PACK FOR CUSTOMER DEDICATED PART

"AV" = TAPE & REEL WITH CAP FOR CUSTOMER DEDICATED PART

"KV" = TAPE & REEL WITHOUT CAP FOR CUSTOMER DEDICATED PART

"TV" = TUBE WITHOUT CAP FOR CUSTOMER DEDICATED PART

"R" = RETENTION FEATURE PAGE 2

IF RETENTION FEATURE "R" AND TUBE PACKAGING "T" ARE BOTH REQUIRED
OPTIONAL LETTER "R" WILL APPEAR INSTEAD OF THE FIRST DASH

EXAMPLE : 77313R118T40LF

"KR" = T&R WITHOUT CAP WITH RETENTION FEATURE

Ø0.4±0.05 TYP

1.14 REF

0.2±0.03 TYP

N x 2.54 MAX

NOTE 5

(N-1) x 2.54

4.83

0.66

2.54

0.62 SQUARE

2.54

(MATING SIDE) ±0.2

(SOLDER SIDE)±0.25


2.54±0.08
NON-ACCUM TYP

2.54±0.08

Ø1.02±0.08

RECOMMENDED HOLE PATTERN
SEE NOTE 6

NOTE 4

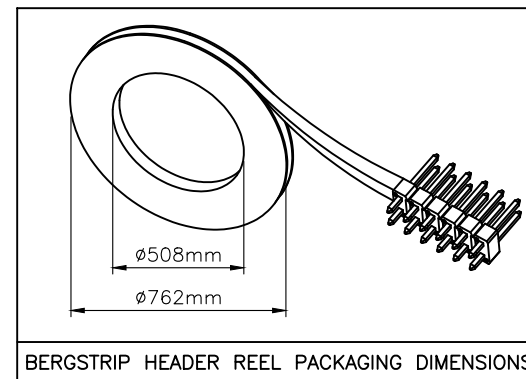OAL (OVERALL LENGTH)
REF


BERGSTRIK HEADER REEL PACKAGING DIMENSIONS

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BERGSTIK						
ltr	ecn no	dr	date	tolerances unless otherwise specified					title UNSHR.HEADER STR DR TMT							
BY	F-21455	AMA	15.07.20	angles	linear	.x ±0.3			scale 5:1							
CA	F-22605	BVE	15.11.24			.xx ±0.15										
CB	F-23186	AMA	16.02.01			.xxx ±0.05										
CC	F-23264	AMA	16.02.16	dr	D.LE	01.01.24										
CD	F-23581	AMA	16.03.22	enrg	JM.C	01.01.24			77313		A3					
CE	F-24865	AMA	16.08.31	chr	JM.C	01.01.24			type		CUSTOMER			Drawing		
CF	B-26200	JCA	17.02.27	appd	JCO	01.01.24										
sheet index	revision sheet	CF	BK	C												
		1	2	3												

PLATING

- 1 = 0.76µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- 4 = 2µm TIN MIN FULL PLATED
- 5 = 0.25µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- 8 = 0.38µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- G = 0.76µm FULL GXT
- S = 0.38µm FULL GXT
- T = 2µm TIN MIN FULL PLATED INCLUDED PIN TYP
 - 1.27µm NICKEL MIN UNDERLAYER FOR ALL PLATING VERSIONS

RETENTION OPTION

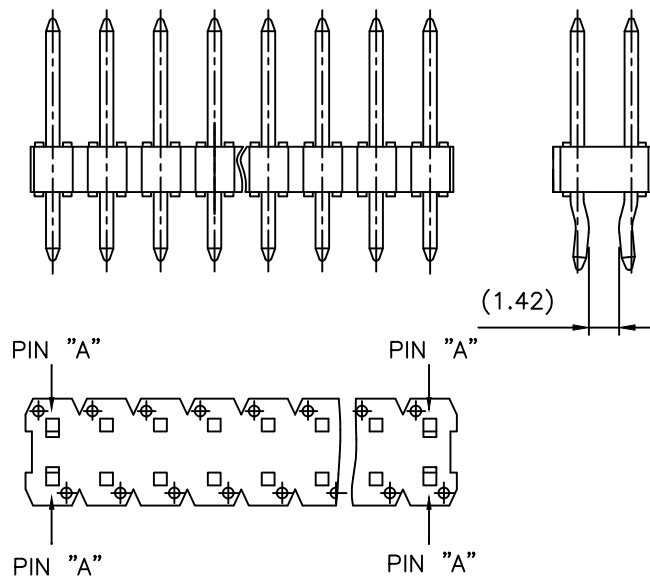

NOTES:

- PART NUMBER 77313-YXXRXXLF
- 4 PINS "A" USED FOR RETENTION
DIRECTION OF RETENTION SHOWN BY ARROWS
PIN "A" AT EACH END OF HEADER.
- FOR RETENTION OPTION , SOLDER TAIL LENGTH TO BE
2.9 MIN UP TO 3.5 MAX.

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
01		5.84	2.41	10.8
02		5.84	3.42	11.8
03		5.72	5.09	13.35
04		5.72	7.64	15.90
15		8.51	2.55	13.6
18		5.84	3.05	11.43
19		12.83	3.03	18.4
20		15.37	3.04	20.95
22		7.75	3.05	13.35
24		6.75	2.9	12.2
27		6.6	2.65	11.8
29		17.46	3.50	23.5
38		5.84	3.82	12.20
46		8.08	2.98	13.6
52		9.5	3.05	15.09
57		8.46	3.05	14.05
58		14.47	3.05	20.06
83		20.46	3.0	26.0
85		10.5	2.9	15.9
87		6.98	3.05	12.57

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
89		6.93	5.00	14.47
90		6.75	4.05	13.34
91		5.60	10.21	18.4
92		5.65	12.76	20.95
93		6.00	4.81	13.35
94		9.65	2.90	15.09
95		8.90	3.60	15.09
96		20.83	3.05	26.42
97		14.70	3.70	20.95
98		6.00	6.00	14.47
99		8.05	2.25	12.8
AA		11.90	3.30	17.70
AB		7.00	1.50	11.00
AC		N/A		
AD		8.51	10.59	21.64
AE		3.30	3.30	9.14
AF		N/A		
AG		4.79	3.00	10.33
AH		2.67	3.43	8.64
AJ		8.00	8.00	18.54
AK		7.00	7.00	16.54
AL		5.90	1.60	10.05
AM		12.06	2.60	17.20
AN		11.50	1.90	15.94
AP		14.00	2.20	18.70
AR		8.96	2.10	13.60
AS		8.08	2.72	13.37

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406 ISO 1101		BERGSTIK
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title
BE	B-18917	LMU	14.09.26	angles	linear		UNSHR.HEADER
BF	B-19782	AMA	14.12.18				STR DR TMT
BG	B-20321	AMA	15.01.26			scale N/A	
BH	B-20596	AMA	15.03.30	dr	D.LE	01.01.24	dwg no
BJ	F-21455	AMA	15.07.20	engr	JM.C	01.01.24	sheet 2 of -
BK	F-22605	BVE	15.11.24	chr	JM.C	01.01.24	size
				appd	JF.N	01.01.24	A3
sheet index	revision sheet						type
							CUSTOMER Drawing

1

2 3

4

5

6

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
AT		5.84	7.20	15.57
AU		10.95	3.05	16.55
AV		8.08	4.32	14.96
AW		8.08	3.81	14.43
AX		6.40	3.09	12.05
AY		5.08	2.79	10.40
BA		8.97	2.79	14.05
BB		6.48	3.05	12.05
BC		11.85	4.04	18.40
BD		26.00	3.05	31.55
BE		9.08	1.90	13.52

A

B

C

D

A

B

C

D



Copyright FCI

mat'l. code				surface ISO 1302 ☒		tolerance ISO 406 ISO 1101		projection 		product family BERGSTIK					
ltr		ecn no		dr		date		tolerances unless otherwise specified		title					
A		F-22605		BVE		15.11.24		angles		linear		mm		UNSHR.HEADER STR DR TMT	
B		F-23264		AMA		16.02.16									
C		B-26200		JCA		17.02.27						scale N/A			
								dr		D.LE		01.01.24		dwg no 77313 A3	
								engr		JM.C		01.01.24			
								chr		JM.C		01.01.24			
								appd		JF.N		01.01.24			
sheet index		revision sheet												type CUSTOMER Drawing	

1

2

5

6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[77313-101-44LF](#) [77313-101-68LF](#) [77313-102-44LF](#) [77313-102-46LF](#) [77313-102-52LF](#) [77313-102-54LF](#) [77313-102-56LF](#) [77313-102-58LF](#) [77313-102-60LF](#) [77313-102-62LF](#) [77313-102-66LF](#) [77313-102-68LF](#) [77313-102-70LF](#) [77313-122-18LF](#) [77313-122-28LF](#) [77313-122-38LF](#) [77313-122-42LF](#) [77313-122-46LF](#) [77313-122-48LF](#) [77313-122-52LF](#) [77313-122-54LF](#) [77313-122-56LF](#) [77313-122-58LF](#) [77313-122-62LF](#) [77313-122-66LF](#) [77313-122-68LF](#) [77313-122-70LF](#) [77313-124-38LF](#) [77313-124-42LF](#) [77313-124-48LF](#) [77313-124-54LF](#) [77313-124-56LF](#) [77313-124-58LF](#) [77313-124-62LF](#) [77313-124-66LF](#) [77313-124-68LF](#) [77313-124-70LF](#) [77313-127-36LF](#) [77313-127-42LF](#) [77313-127-44LF](#) [77313-127-48LF](#) [77313-127-50LF](#) [77313-127-52LF](#) [77313-127-56LF](#) [77313-127-58LF](#) [77313-127-60LF](#) [77313-127-62LF](#) [77313-127-66LF](#) [77313-127-68LF](#) [77313-127-70LF](#) [77313-158-56LF](#) [77313-190-08LF](#) [77313-401-36LF](#) [77313-402-16LF](#) [77313-427-08LF](#) [77313-427-10LF](#) [77313-427-14LF](#) [77313-427-16LF](#) [77313-801-32LF](#) [77313-801-36LF](#) [77313-801-38LF](#) [77313-801-44LF](#) [77313-801-52LF](#) [77313-801-54LF](#) [77313-801-56LF](#) [77313-801-58LF](#) [77313-801-60LF](#) [77313-801-62LF](#) [77313-801-64LF](#) [77313-801-68LF](#) [77313-801-70LF](#) [77313-802-18LF](#) [77313-802-38LF](#) [77313-802-40LF](#) [77313-802-42LF](#) [77313-802-46LF](#) [77313-802-48LF](#) [77313-802-50LF](#) [77313-802-54LF](#) [77313-802-56LF](#) [77313-802-58LF](#) [77313-802-62LF](#) [77313-802-64LF](#) [77313-802-68LF](#) [77313-802-70LF](#) [77313-818-18LF](#) [77313-818-22LF](#) [77313-818-28LF](#) [77313-818-34LF](#) [77313-818-38LF](#) [77313-818-42LF](#) [77313-818-44LF](#) [77313-818-48LF](#) [77313-818-52LF](#) [77313-818-54LF](#) [77313-818-56LF](#) [77313-818-58LF](#) [77313-818-60LF](#) [77313-818-62LF](#) [77313-818-66LF](#)