

Product data sheet

Miniature connectors




Product description	M16 IP67 female panel mount connector, Contacts: 8 DIN, shielding is not possible, dip-solder, IP68, UL, AISG compliant
Area	M16 IP67 series 723
Order number	09 0174 90 08


Illustration



Scale drawing



Contact arrangement



	X	Y
1	-3,50	0,00
2	0,00	3,50
3	3,50	0,00
4	-2,47	2,47
5	2,47	2,47
6	-2,47	-2,47
7	2,47	-2,47
8	0,00	-0,70

You can find the assembly instructions on the next page.

Technical data

General values

Connector design	female panel mount connector
Connector locking system	screw
Termination	dip-solder
Upper limit temperature	95 °C
Lower limit temperature	- 40 °C
Customs tariff number	85369010
Packaging Unit	20

Cable data

Approval 1	UL
Approval 2	AISG compliant

Electrical values


Rated current (40 °C)	5 A
Rated voltage	60 V
Rated impulse voltage	500 V
Pollution degree	1
Overvoltage category	I
Insulating material group	III
Insulation resistance	$\geq 10^{10} \Omega$
EMC compliance	shielding is not possible
Degree of protection	IP68
	IP67
Mechanical operation	> 500 Mating cycles

Material

Contact material	CuSn (bronze)
Contact plating	Ag (silver)
Contact body material	PBT (UL94 V-0)
Housing material	Zinc die-cast nickel-plated

Product description	M16 IP67 female panel mount connector, Contacts: 8 DIN, shielding is not possible, dip-solder, IP68, UL, AISG compliant
Area	M16 IP67 series 723
Order number	09 0174 90 08

Assembly instructions / Panel cut-out

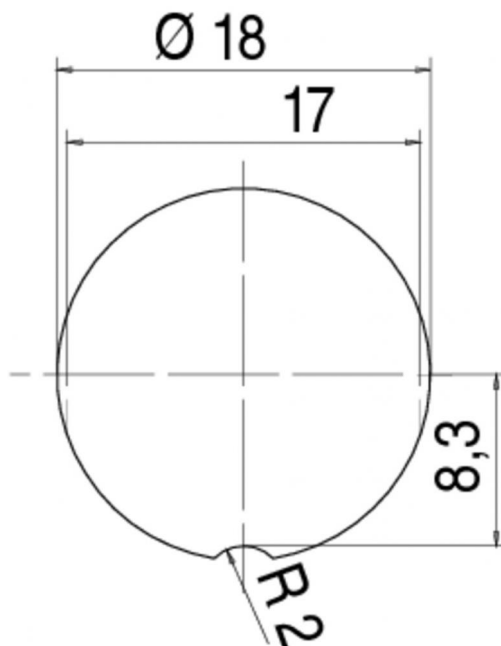

Product description	M16 IP67 female panel mount connector, Contacts: 8 DIN, shielding is not possible, dip-solder, IP68, UL, AISG compliant
Area	M16 IP67 series 723
Order number	09 0174 90 08

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.