


| | | | | | |
|----------|------------|----------|--|------|--------|
| Part No. | 5W4VC-E15Y | Spec No. | | Page | 1 of 3 |
|----------|------------|----------|--|------|--------|

Features

- ◆ Standard 5mm diameter package
- ◆ Viewing angle 20-25°
- ◆ General purpose leads
- ◆ Reliable and rugged

Package Dimension:

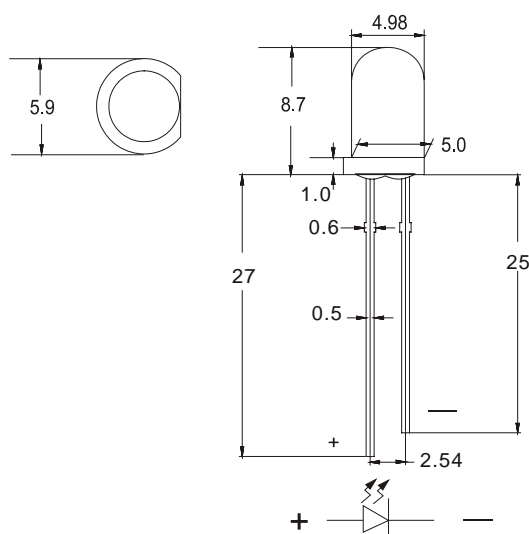

NOTE:TOLERANCE $\pm 0.5\text{mm}$

| Part NO. | Lens Color | Source Color |
|------------|-------------|---------------------|
| 5W4VC-E15Y | Water Clear | Supper Bright White |

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(.10)$ mm unless otherwise noted.
3. Protruded resin under flange is 1.0mm(.04") max.
4. Lead spacing is measure where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Caution in ESD:
Static Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

| | | | | | |
|----------|------------|----------|--|------|--------|
| Part No. | 5W4VC-E15Y | Spec No. | | Page | 1 of 3 |
|----------|------------|----------|--|------|--------|

Absolute Maximum Ratings at Ta=25°C

| Parameter | MAX. | Unit |
|--|---------------------|-------|
| Power Dissipation | 100 | mW |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 100 | mA |
| Continuous Forward Current | 30 | mA |
| Derating Linear From 50°C | 0.4 | mA/°C |
| Reverse Voltage | 5 | V |
| Operating Temperature Range | -40°C to +80°C | |
| Storage Temperature Range | -40°C to +80°C | |
| Lead Soldering Temperature [4mm(.157") From Body] | 260°C for 5 Seconds | |

Electrical Optical Characteristics: at Ta=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|-------|------|-------|---------------|----------------------------|
| Luminous Intensity | I_v | 20000 | --- | 25000 | mcd | $I_F=40\text{mA}$ (Note 1) |
| Viewing Angle | $2\theta_{1/2}$ | --- | 15 | --- | Deg | (Note 2) |
| Peak Emission Wavelength | λ_p | --- | B/Y | --- | nm | $I_F=20\text{mA}$ |
| Spectral Line Half-Width | $\Delta\lambda$ | --- | 30 | --- | nm | $I_F=20\text{mA}$ |
| Forward Voltage | V_F | 3.3 | 3.5 | 3.7 | V | $I_F=20\text{mA}$ |
| Reverse Current | I_R | --- | --- | 10 | μA | $V_R=5\text{V}$ |





Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength, which defines the color of the device.

| | | | | | |
|----------|------------|----------|--|------|--------|
| Part No. | 5W4VC-E15Y | Spec No. | | Page | 2 of 3 |
|----------|------------|----------|--|------|--------|

Typical Electrical/Optical Characteristics Curves
(25°C Ambient Temperature Unless Otherwise Noted)

Spectral Radiance Blue Peak@465nm
Yellow Peak@555nm

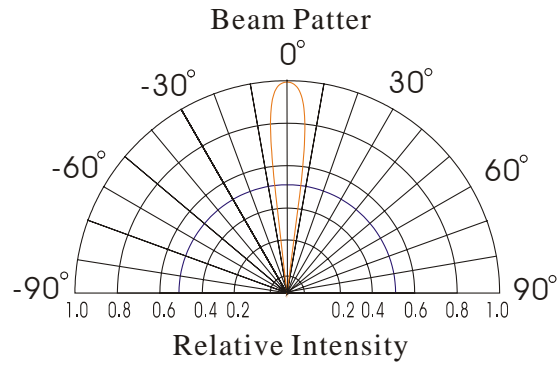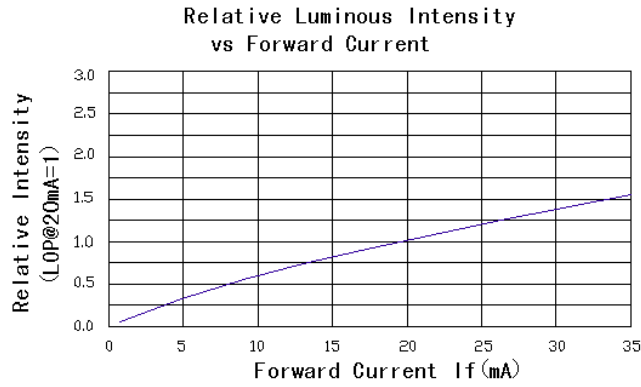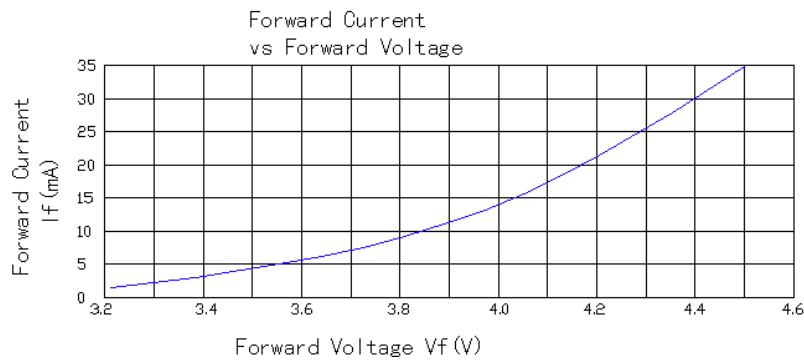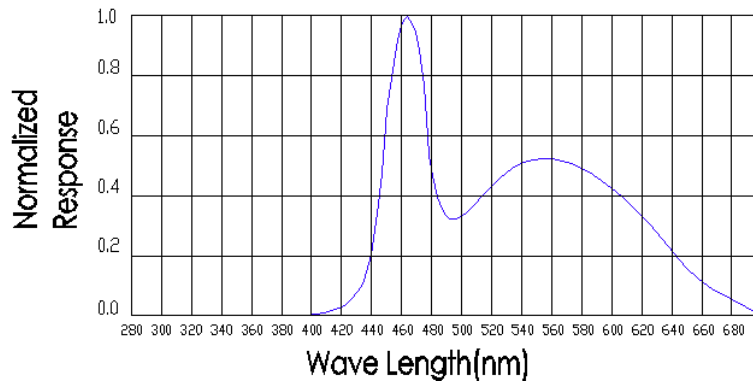

| | | | | | |
|----------|------------|----------|--|------|--------|
| Part No. | 5W4VC-E15Y | Spec No. | | Page | 3 of 3 |
|----------|------------|----------|--|------|--------|